

Compact evaluation unit for speed monitoring/Measuring turbine



- Measures and monitors Water 0.2 .. 650 l/min
- Connection thread/flange clamping
- Body material SS304, SS316
- For cost-sensitive applications

Characteristics

Specially designed for water, diesel, gasoline.

Good repeatability, 0.05%~0.2% for short.

The VHS system consists of two interlacing screws which run in
Wide measuring range, 1:10 for small size and 1:20 for large size.

Suitable for high pressure measuring.

Used electronics UNI-F-DA converter input signal in the following output:

- Analog signal 0/4 – 20 mA
- Analog signal 0 – 10 V
- Frequency signal 0 .. 2000Hz
- Impulse about the volume of flowing liquid
- Switch output

Sensor with switching output push/pull, pnp, npn.

Set by parameter.

Specifications


Sensor	Measuring turbine
Nominal width	DN 10 .. 50
Process connection	thread/flange clamping
Accuracy	±1 % of the measured value of 1 %..100 % nominal working range
Pressure resistance	60/250 Bar
Operating temperature	-25..+80 °C
Fluid temperature	-20 .. +120°C
Materials	SS304, SS316, 2Cr13, Alloy-CD4mCu, Tungsten carbide
Power supply	15 .. 30 V DC
Power requirement	< 1 W (for no-load output)
Output data	all outputs are resistant to short circuits and reversal polarity protected
Current output:	0/4 .. 20 mA
Voltage output:	0 .. 10 V or 0 .. 5V
Frequency output	0 .. 2000 Hz Push/pull, pnp, npn. Iout = 200 mA max.
Switch output	Push/pull, pnp, npn. Iout = 200 mA max.
Puls output	Push/pull, pnp, npn. Iout = 200 mA max.
Display	Yellow LCD shows Operating voltage/Output status
Electrical connection	for round plug connector M12x1, 4pole
Ingress protection	IP 67
Conformity	CE

Range


DN (mm)	Standard flowrange (m ³ /h)	Extended flow range (m ³ /h)	Standard connection & Pressure grade	Special pressure grade(Mpa) (flange clamping)
4	0.04-0.25	0.04-0.4	thread/6.3Mpa	10,16,25
6	0.1-0.6	0.06-0.6	thread/6.3Mpa	10,16,25
10	0.2-1.2	0.15-1.5	thread/6.3Mpa	10,16,25
15	0.6-6	0.4-8	thread/6.3Mpa	4.0,6.3,10,16,25
			flange/2.5Mpa	
20	0.8-8	0.45-9	thread/6.3Mpa	4.0,6.3,10,16,25
			flange/2.5Mpa	
25	1-10	0.5-10	thread/6.3Mpa	4.0,6.3,10,16,25
			flange/2.5Mpa	
32	1.5-15	0.8-15	thread/6.3Mpa	4.0,6.3,10,16,25
			flange/2.5Mpa	
40	2-20	1-20	thread/6.3Mpa	4.0,6.3,10,16,25
			flange/2.5Mpa	
50	4-40	2-40	flange/2.5Mpa	4.0,6.3,10,16,25

SENSESION GmbH

Wiring

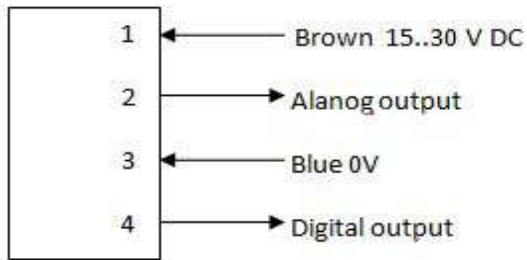

Connection



It is recommended to use shielded wiring.


The push-pull output of the frequency, switch or pulse output version can as desired be switched as PUSCH/PULL a PNP or an NPN output.

The magnetic field sensor reacts to magnetic fields of both polarities perpendicular to the end face.

Note

The CI-1 device configurator with associated software is available as a convenient option for programming all parameters by PC, and for adjustment.


Programming

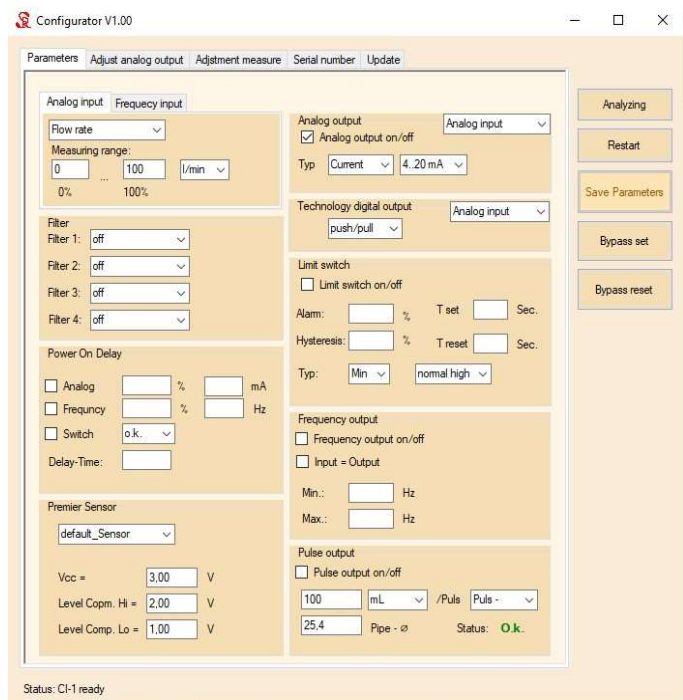


Switch output

The limit switch can be used to monitor minimal or maximal.


With a minimum-switch, falling below the limit value causes a switchover to the alarm state. Return to the normal state occurs when the limit value plus the set hysteresis is once more exceeded.

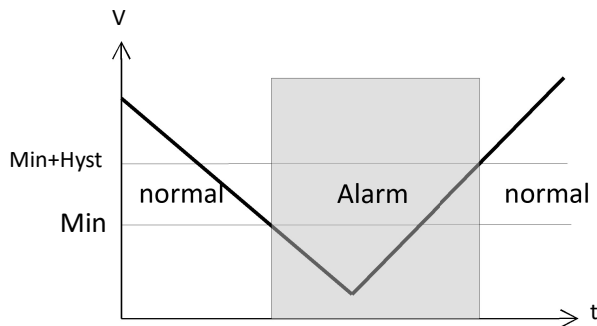

With a maximum-switch, exceeding the limit value causes a switchover to the alarm state. Return to the normal state occurs when the measured value once more falls below the limit value minus the set hysteresis.

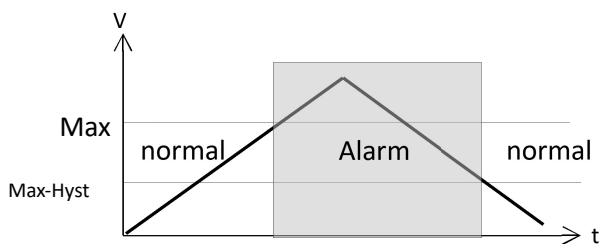


A changeover delay time (t_{DS}) can be applied to switching to the alarm state. Equally, one switch-back delay time (t_{DR}) of several can be applied to switching back to the normal state.

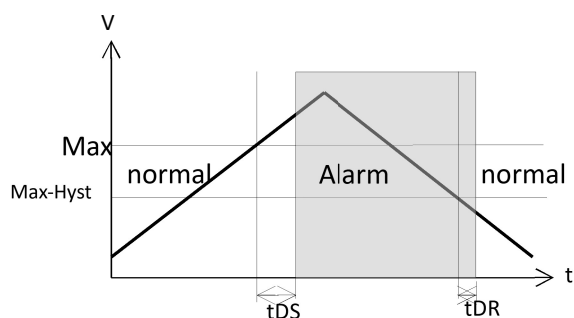

In the normal state the integrated LED is on, in the alarm state it is off, and this corresponds to its status when there is no supply voltage

In the non-inverted (standard) model, while in the normal state the switching output is at the level of the supply voltage; in the alarm state it is at 0 V, so that a wire break would also display as an alarm state at the signal receiver.


Optionally, an inverted switching output can also be provided, i.e. in the normal state the output is at 0 V, and in the alarm state it is at the level of the supply voltage.

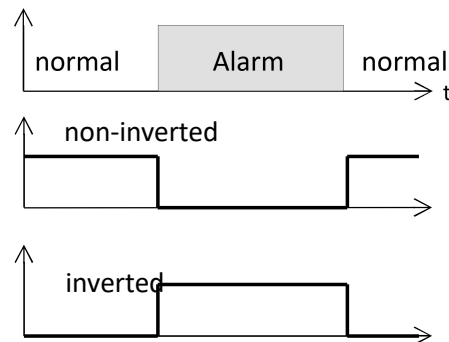

Power-On-Delay for switch output

A Power-On-Delay function (ordered as a separate option) makes it possible to maintain the switching output in the normal state for a defined period after application of the supply voltage.

Frequency output

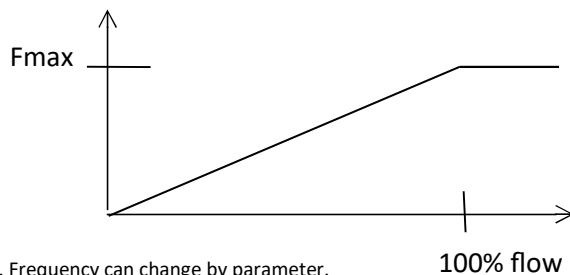

Max. Frequency can change by parameter.

Settings area 0 .. 2000 Hz

The frequency output can be configured so that the signal from the primer sensor is reproduced 1: 1.

This makes it much more convenient to position the sensor in the mechanical block.

Power-On-Delay for frequency output

A Power-On-Delay function (ordered as a separate option) makes it possible to have the frequency output with a fixed frequency for a defined period after application of the supply voltage.

Pulse output

Pulse width 10 ms

Pulse per volume should be specified.

Min. Pulse value = max. Flow rate in sec. / 50


For example:

Flow max = 100 L / min

or Flow max = $100/60 = 1.6\ (6)\ \text{L / sec}$

Min. pulse per volume = $1,6(6)/50 = 0.03(3)\ \text{L}$ or ca. 34 mLiter



Configurator software checks parameters for pulse and outputs message "O.k." or "Error."

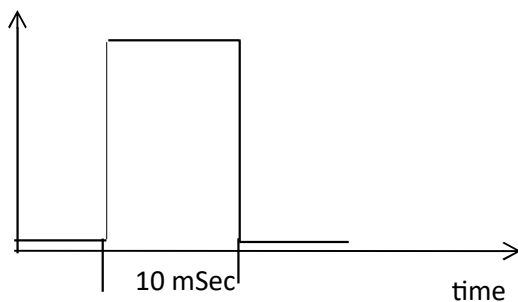

Software "Configurator" converter Input of parameters and helps with settings.


Current output

The current output can be operated as 4 .. 20 mA or 0 .. 20 mA

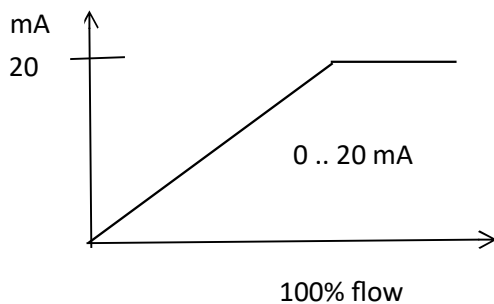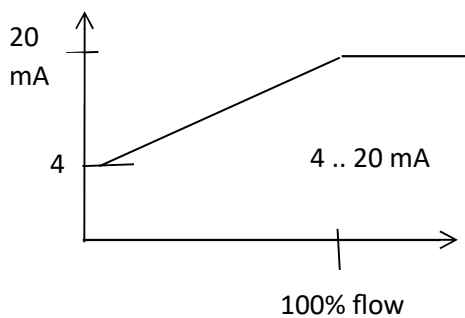

Voltage output

The voltage output can be operated as 0 .. 10V or 0 .. 5 V.

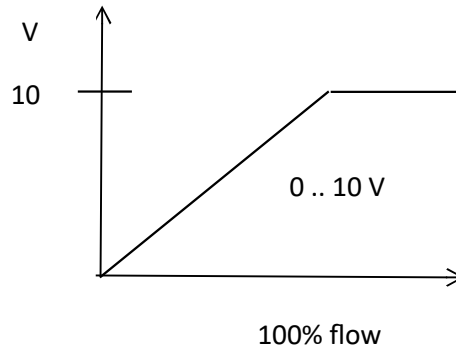

Power-On-Delay for analog output

A Power-On-Delay function (ordered as a separate option) makes

It is possible to have the analog output with a fixed value for a defined period after application of the supply voltage.

Ordering code

RT - 1 - 2 - 3 - 4 - 5 - 6 - 7 - 8

1. 010 – DN10
 015-DN15
 025 – DN25
 040 – DN40
 050 – DN50
2. Additional flange
 0 - no flange
 1 – with flange
3. Metering range
 1.5 – 0.15 .. 1.5m³/h
 8 – 0.4 .. 8m³/h
 10 – 0.5 .. 10m³/h
 20 – 0.8 .. 20m³/h
 40 – 2 .. 40m³/h
4. S -Switch output
 F - Frequency output
 P - Pulse output
5. at swith output 4 digit number of limit value
 000,0 .. 100,0 %
 at swith frequency 4 digit number of max. frequency
 0000 .. 2000
 at pulse output 4 digit number of pulse per volume
 0000 .. 9999
6. Only for pulse output: unit
 1 m³
 2 L
 3 mL
7. I - Current output
 U - Voltage output
8. at current output 2 digit number
 04 - 4 ..20 mA
 00 - 0 .. 20 mA
 at votage output 2 digit number
 10 - 0 ..10 V
 05 - 0..5V